


RADIUS (AT CURB FACE)	W = 3'-0"		W = 4'-0"		W = 5'-0"	
	X	Y	X	Y	X	Y
20 FEET	5' - 5 1/2"	4' - 6 1/2"	4' - 8 1/2"	6' - 0"	4' - 1"	7' - 2 3/4"
30 FEET	7' - 3 3/4"	7' - 1"	6' - 5 1/2"	8' - 11 1/2"	5' - 9 1/4"	10' - 7"
40 FEET	8' - 9 1/2"	9' - 2 1/2"	7' - 10"	11' - 5 1/4"	7' - 1"	13' - 4 1/2"
50 FEET	10' - 3/4"	11' - 3/4"	9' - 1/4"	13' - 7 1/4"	8' - 2 1/2"	15' - 9 1/2"
60 FEET	11' - 2 1/2"	12' - 8 3/4"	10' - 3/4"	15' - 6 1/2"	9' - 2 1/4"	17' - 11 3/4"

RADIUS (AT CURB FACE)	W = 6'-0"		W = 7'-0"	
	X	Y	X	Y
20 FEET	3' - 7"	8' - 3 1/2"	3' - 1 1/2"	9' - 2 1/2"
30 FEET	5' - 2 1/2"	12' - 0"	4' - 8 3/4"	13' - 3 1/4"
40 FEET	6' - 5 3/4"	15' - 3/4"	5' - 11 1/2"	16' - 7 1/4"
50 FEET	7' - 6 1/2"	17' - 9"	6' - 11 3/4"	19' - 6 1/4"
60 FEET	8' - 5 3/4"	20' - 1 3/4"	7' - 10 1/2"	22' - 1 1/2"

SEE DRAWING
4-14(5) FOR PLAN
& SECTION DETAIL.

INTERMEDIATE RADII CAN BE INTERPOLATED

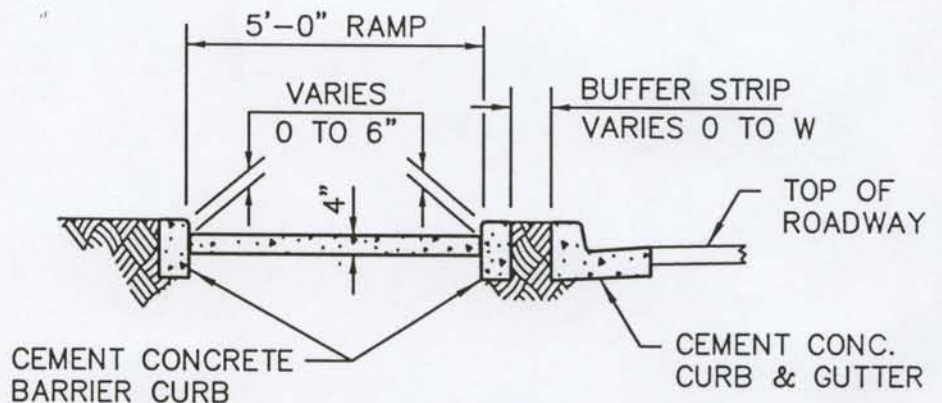

SECTION 4

NOTE:

1. CURB RAMPs SHALL BE PROVIDED AT ALL INTERSECTIONS.
2. SEE DRAWING 4-14(5) FOR PLAN & SECTION DETAIL.
3. AVOID PLACING DRAINAGE STRUCTURES, JUNCTION BOXES OR OTHER OBSTRUCTIONS IN FRONT OF RAMP ACCESS AREAS.
4. CURB AND GUTTER SHOWN.
5. RAMP SLOPES SHALL NOT BE STEEPER THAN 12H:1V

TOWN OF FRIDAY HARBOR			
SIDEWALK RAMP TYPE 4B			
APPROVED: <i>C. King</i> TOWN ADMINISTRATOR		DATE	
DATE: 02/04/04		DRWN: B.W.	CHKD: T.N.
			SCALE: NO SCALE
			DWG. NO. 4-14(6)