



- 1) SADDLE W/2 IN. FIPT TAP - ROMAC 202S
- 2) CORP STOP
- 3) 2" DIA. BRASS IPT NIPPLE (LENGTH AS REQUIRED)
- 4) 2" BRASS 90° IPT ELBOW
- 5) 2" AWWA NON-RISING STEM, RESILIENT WEDGE GATE VALVE W/FIPT ENDS AND 2" OPERATING NUT
- 6) VALVE BOX - TYLER SERIES 6855 W/DROP LID OR APPROVED EQUAL THE WORD "WATER" TO BE CAST IN LID
- 7) 2" COPPER PACK JOINT COUPLING PACK X MIPT FORD C84-77 OR APPROVED EQUAL
- 8) 2" DIA TYPE K RIGID COPPER PIPE OR 2" 200 PSI PVC CTS
- 9) 2" THK. X 12" X 12" CONCRETE BLOCK
- 10) 2" COPPER PACK JOINT COUPLING PACK X FIPT FORD C14-77 OR APPROVED EQUAL
- 11) 2" MIPT PLUG W/SQUARE OR HEX WRENCH HEAD, BRASS OR PVC
- 12) THRUST BLOCK
- 13) WATER MAIN - SIZE VARIES
- 14) PIPE CAP - SIZE VARIES
- 15) 6 MIL PLASTIC

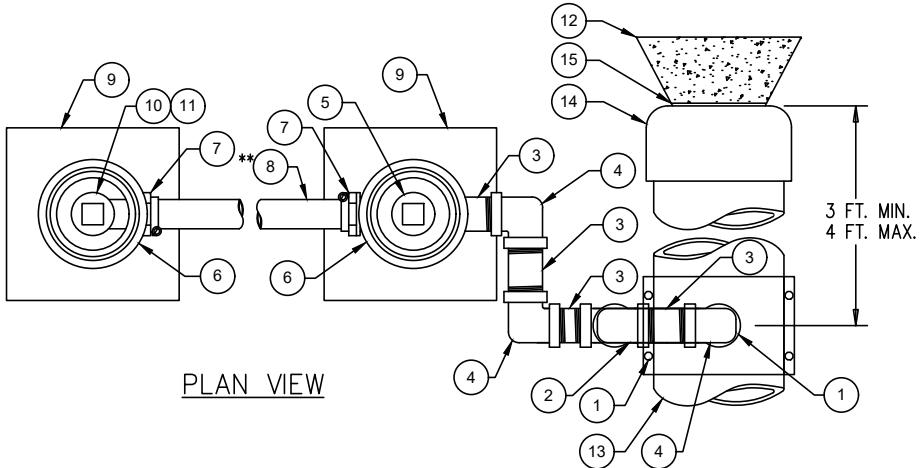

PLAN VIEW

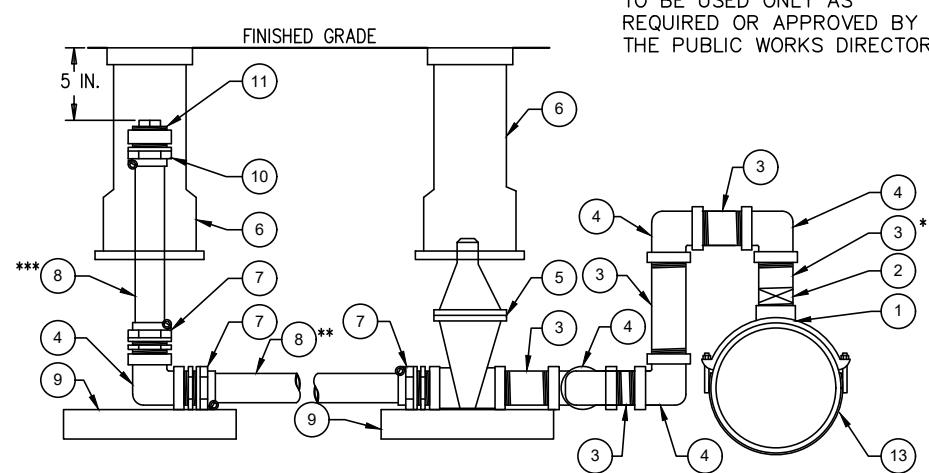

ELEVATION VIEW

NO SCALE

NOTES:

1. SAND OR SELECT BACKFILL REQUIRED WITHIN 6" OF ALL PIPE AND FITTINGS.
- * FOR LIVE TAPS NIPPLE TO BE REPLACED WITH 2" MIPT X MIPT CORPORATION STOP - FORD FB500
- ** COPPER PIPE TO BE CUT AT 24" LONG
- *** COPPER PIPE TO BE CUT AS REQUIRED

		APPROVAL
		WAYNE R. HAUFLE
		PUBLIC WORKS DIRECTOR
2" BLOW-OFF ASSEMBLY		DATE 01/21/2022
		DRAWING NO. W-14
		REV: