



CEMENT CONCRETE TRAFFIC CURB AND GUTTER

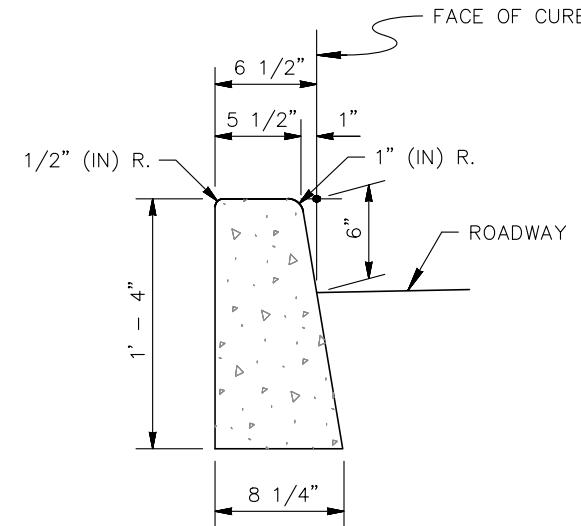

CEMENT CONCRETE TRAFFIC CURB

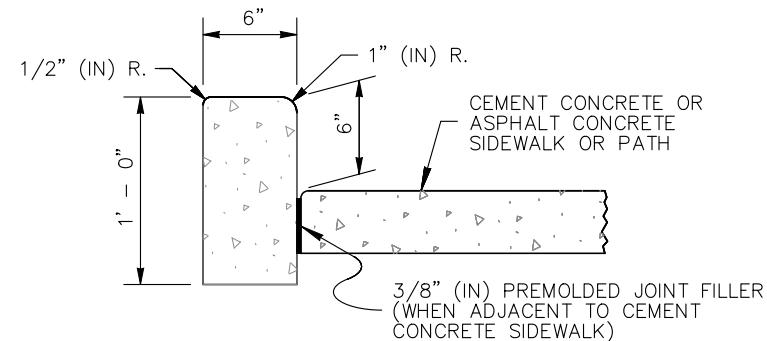

CEMENT CONCRETE PEDESTRIAN CURB

NOTES:

1. THE CURBS, GUTTERS AND SIDEWALKS SHALL HAVE CONTRACTION JOINTS (3/8" x 1-1/2") AT INTERVALS OF NOT GREATER THAN 15'-0".
2. CEMENT CONCRETE SHALL BE CLASS 4000.
3. SEE DRAWING NO. 18 FOR EXPANSION JOINT DETAIL AND SPACING.
4. CURBS SHALL BE CONSTRUCTED ON 4" MIN CRUSHED SURFACING TOP COURSE, COMPAKTED TO 95% OF MAXIMUM DRY DENSITY.



APPROVAL

Wayne R. Hayden

PUBLIC WORKS DIRECTOR

DATE
01/21/2022

DRAWING NO.

ST-17

REV:

**CEMENT CONCRETE
CURBS**

NO SCALE