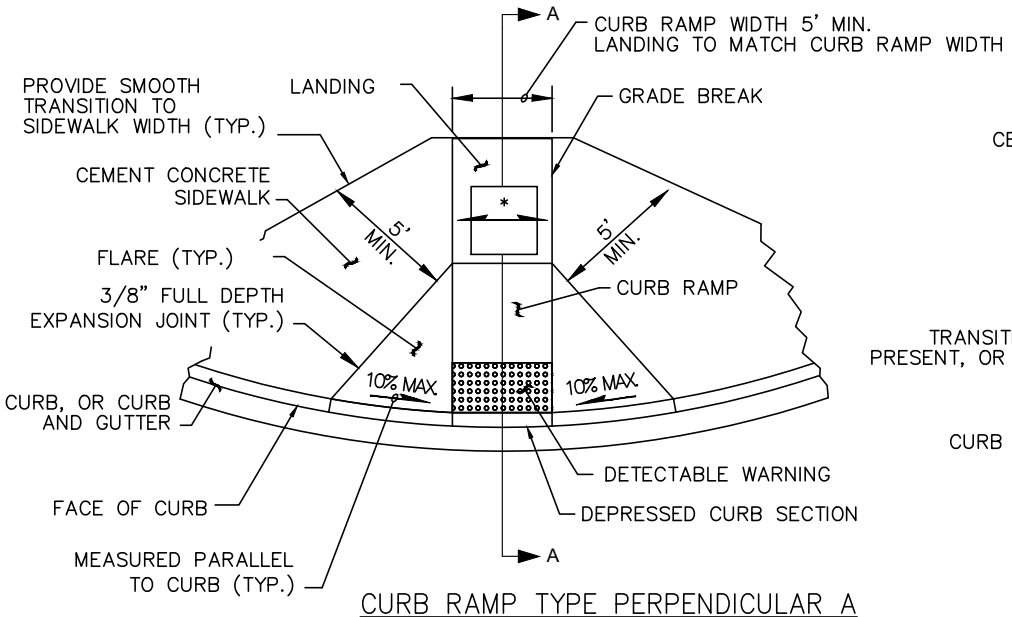

CURB RAMP TYPE PERPENDICULAR A

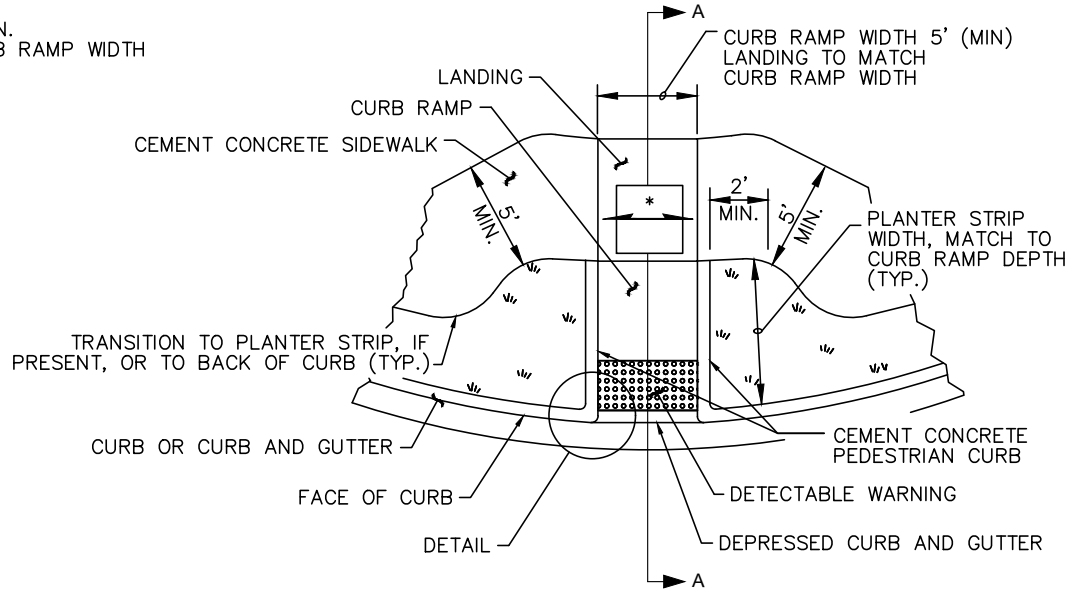

CURB RAMP TYPE PERPENDICULAR B

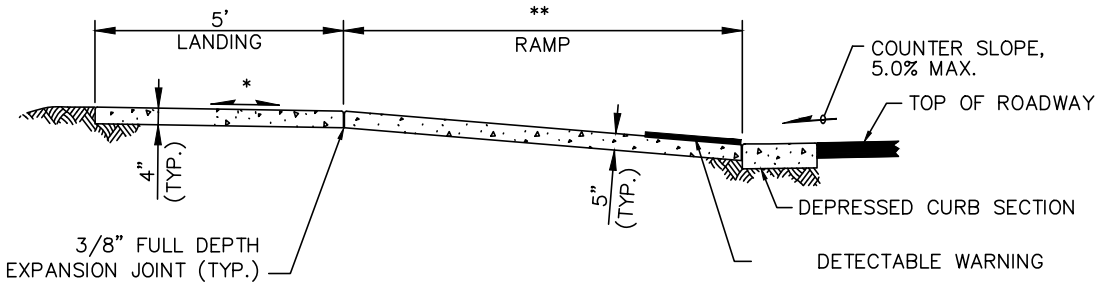

SECTION A–A

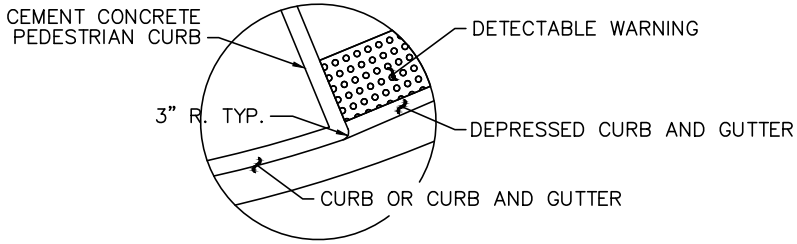

DETAIL

NOTES:

SEE ST–20 FOR CURB RAMP CONSTRUCTION NOTES.

LEGEND:

SLOPE IN EITHER DIRECTION

* 1.5% OR FLATTER RECOMMENDED FOR DESIGN/FORMWORK (2% MAX).

** 7.5% OR FLATTER RECOMMEND FOR DESIGN/FORMWORK (8.3% MAX).

*** RUNNING SLOPE OF THE CURB RAMP SHALL BE 8.3% MAXIMUM BUT SHALL NOT REQUIRE THE RAMP LENGTH TO EXCEED 15 FT. AS MEASURED RADIALLY AT BACK OF RAMP.

NO SCALE

TOWN OF FRIDAY HARBOR Incorporated 1909 WASHINGTON

APPROVAL

Wayne R. Hayfield

PUBLIC WORKS DIRECTOR

PERPENDICULAR CEMENT CONCRETE CURB RAMP

DATE **01/21/2022**

DRAWING NO. **ST-21**

REV:

I:\FRHARBOR\15476 standards\new standard\section 8 street\Drawings\ST-21 PERPENDICULAR CEMENT CONCRETE CURB RAMP.dwg, 1/18/2022 1:36 PM, BERNIE HAYDEN