
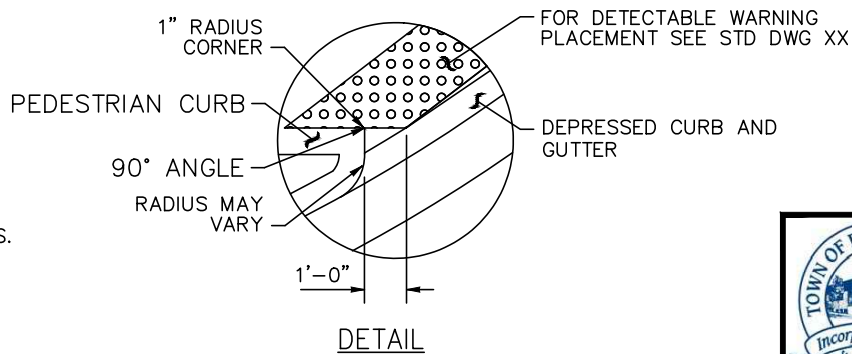
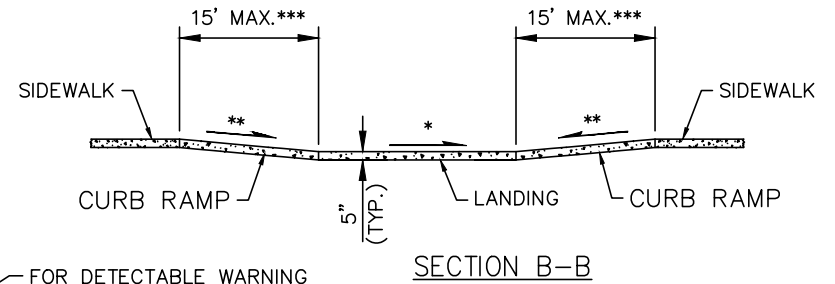
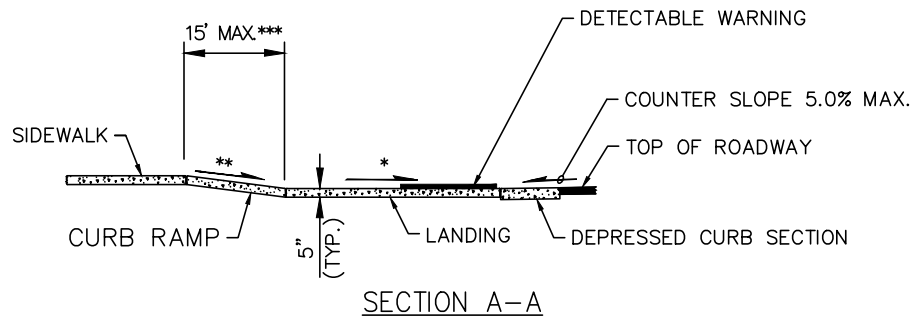
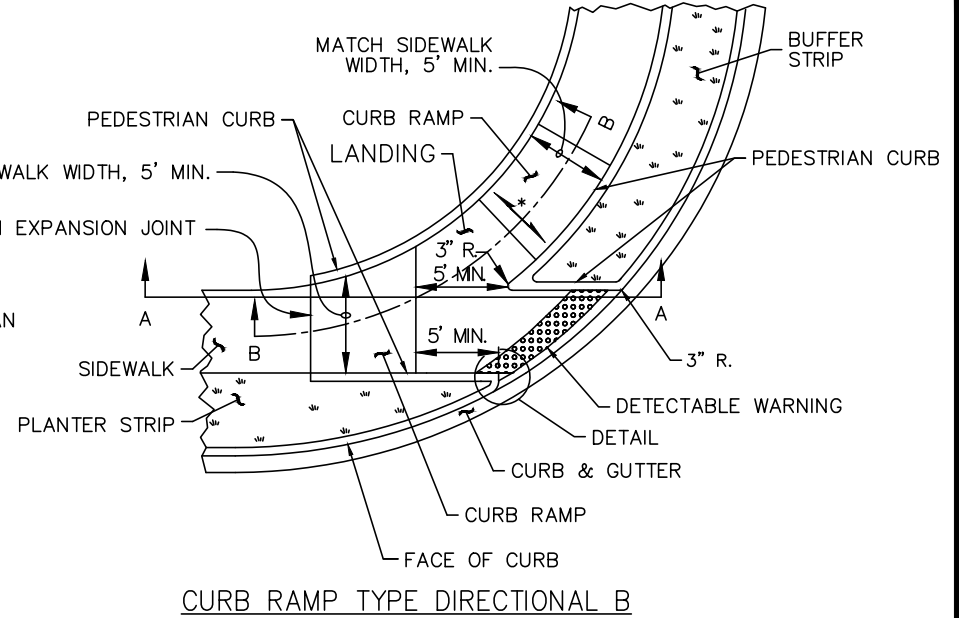


I:\FRHARBOR\15476 standards\new standard\section 8 street\Drawings\ST-23 DIRECTIONAL CEMENT CONCRETE CURB RAMP.dwg, 1/18/2022 1:46 PM, BERNIE HAYDEN

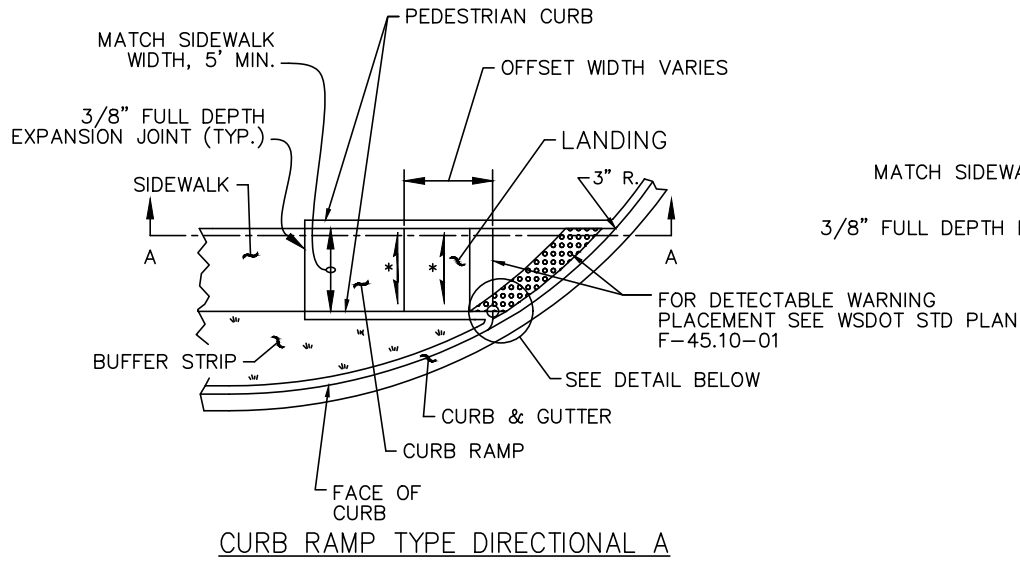

NOTES:

SEE ST-20 FOR CURB RAMP CONSTRUCTION NOTES.

LEGEND:

— SLOPE IN EITHER DIRECTION

* 1.5% OR FLATTER RECOMMENDED FOR DESIGN/FORMWORK (2% MAX).

** 7.5% OR FLATTER RECOMMEND FOR DESIGN/FORMWORK (8.3% MAX).

*** RUNNING SLOPE OF THE CURB RAMP SHALL BE 8.3% MAXIMUM BUT SHALL NOT REQUIRE THE RAMP LENGTH TO EXCEED 15 FT. AS MEASURED RADIALLY AT BACK OF RAMP.

NO SCALE



APPROVAL

Wayne R. Hausle

PUBLIC WORKS DIRECTOR

**DIRECTIONAL
CEMENT CONCRETE
CURB RAMP**

DATE
01/21/2022

DRAWING NO.
ST-23

REV: