


NOTES:

1. IF ADDITIONAL SIGN IS MOUNTED ON POLE, HEIGHT MUST BE GREATER TO ALLOW FOR 7' OF CLEARANCE FROM BOTTOM OF SIGN TO FINISHED GRADE.
2. NEATLY SAWCUT OR LEAVE BUCK-OUT FOR SIGN POST. INSTALL EXPANSION JOINT MATERIAL AND REPLACE WITH CONCRETE.
3. POSTS AND ANCHORS SHALL BE COLORED GREEN, COLORED WITH AN ACRYLIC ENAMEL BY ELECTROD EPOSITION AND THOROUGHLY BAKED. COLOR IS PERMA-GREEN PER FEDERAL STANDARD 595-A COLOR NUMBER 14109. OBTAIN TOWN APPROVAL PRIOR TO INSTALLATION.
4. THE SHEET ALUMINUM SIGN SHALL BE CONSTRUCTED OF ALLOY 6061-T6. 5052-H36 OR 5052-H38, WITH A THICKNESS OF 0.080 IN OR 14 GUAGE.
5. SIGN FACE MATERIAL FOR POST-MOUNTED STREET NAME SIGNS SHALL BE TYPE IV WHITE SHEETING OVERLAID WITH GREEN ELECTRO CUT FILM WITH THE STREET NAME CUT OUT.
6. LETTERS SHALL BE 4" UC C SERIES, EXCEPT SUFFIXES AND PREFEIXES 3" UC C SERIES
7. ALL ROADWAYS SHALL INCLUDE THE ABBREVIATED LABEL (I.E. - COURT - CT. AVENUE - AVE. ETC.) ROADWAY LABEL SHALL BE UPPER CASE.



NO SCALE

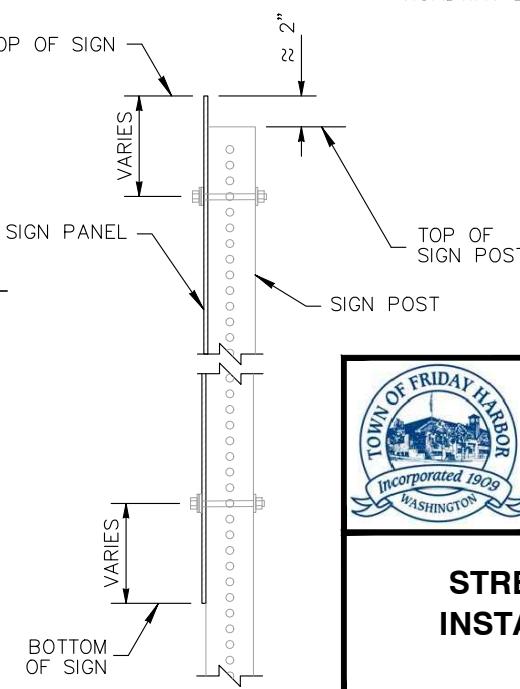

APPROVAL

Wayne R. Haefke

PUBLIC WORKS DIRECTOR

DATE
01/21/2022

• 1, 2, 3

DRAWING NO.
ST-32

REV:

STREET SIGN INSTALLATION